

WS303U Compact ultrasonic wind speed and direction transmitter

MAIN FEATURES

- Using the transmitted acoustic pulse, the phase difference of the receiver is measured to calculate the wind speed and direction, and the wind speed and direction data are measured and output at the same time.
- It is made of ABS engineering plastics, with small wear and long service life.
- The random error identification technology can ensure the low discrete error of measurement under strong wind, and make the output more stable without on-site calibration.
- 485 communication interface, standard Modbus RTU communication protocol, communication address and baud rate can be set, the farthest communication distance is 2000 meters.




OVERVIEW

WS303U compact ultrasonic wind speed and direction sensor is a wind speed and direction measuring instrument developed by our company based on ultrasonic principle, which can simultaneously measure the instantaneous value of wind speed and direction.

SPECIFICATION

Supply voltage	10-30V DC (0-10V output is powered by 24 V)	
Power consumption	485: 0.12W 4~20mA/0~5V/0~10V: 1.2W	
Range	Wind speed	0 ~ 40m / S, 0 ~ 70m / S(customizable) 0.5m starting wind speed
	Wind direction	0~360°
Accuracy	Wind speed	±0.5+2%FS
	Wind direction	±3°
Resolution	Wind speed	0.01 m/s
	Wind direction	1°
Working environment	-40~80°C, 0~95%RH	
Wind resistance	75 m/s	
Response time	1S	
IP grade	485 type: IP65 Analog type: IP54	
Signal output	485 (Modbus RTU protocol) 4 ~ 20mA current output 0 ~ 5V voltage output 0 ~ 10V voltage output	

DIMENSION

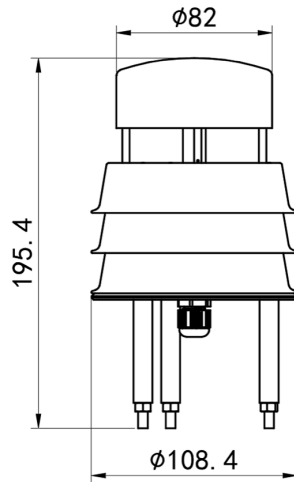

ORDER CODE

WS303U	Ultrasonic Wind Speed & Direction Sensor		
	CODE	Function type	
	A	No built-in electronic compass	
	B	Built-in electronic compass	
		CODE	Signal output
		1	4~20mA
		2	0-10V
		3	0-5V
		4	RS485
WS303U	A	1	Order example

APPLICATION

